
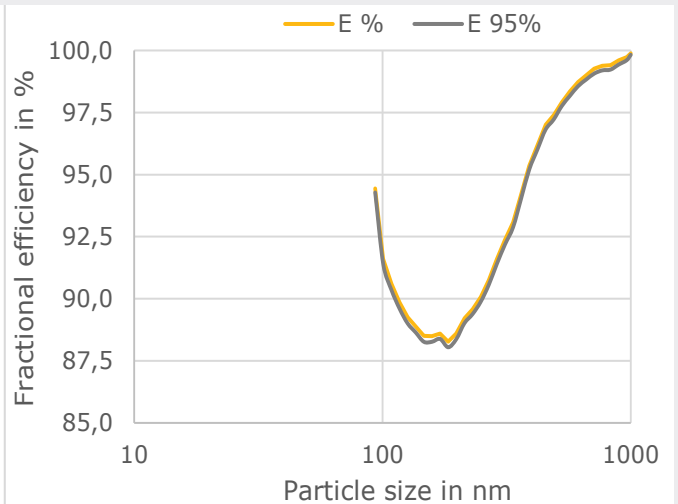




## MPC & MPZ ECO-85 GTP (Conical & Cylindrical Set)

Filter Media	Water repellent synthetic media	
Effective Filter Area	26.8m <sup>2</sup>	
Designated Filter Group acc. to ISO 16890	ISO ePM <sub>1</sub> 85% (formerly F9/EN 779)	
Further Filter Groups acc. to ISO 16890	PM <sub>2,5</sub> 90%	PM <sub>10</sub> >95%
Nominal Air Flow Rate	2500m <sup>3</sup> /h	
Initial Pressure Drop	145 Pa	
Temperature Resistance	80°C	

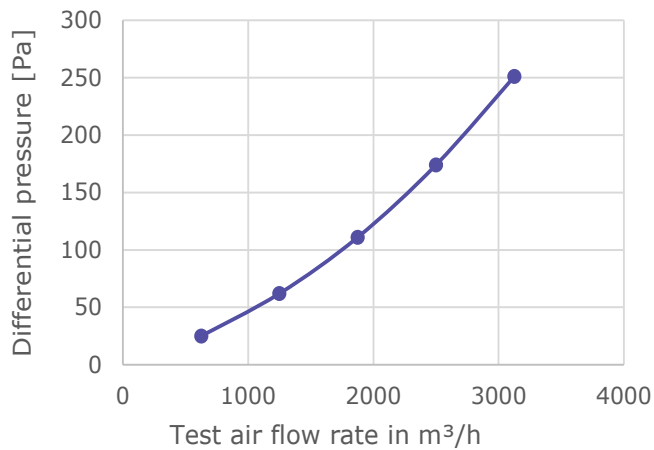

## MPC & MPZ Pure-E10 GTP (Conical & Cylindrical Set)

Filter Media	Water repellent hybrid media
Effective Filter Area	26.8m <sup>2</sup>
Filter Class acc. to EN 1822	E10
Nominal Air Flow Rate	2500m <sup>3</sup> /h
Initial Pressure Drop	175 Pa
Temperature Resistance	80°C

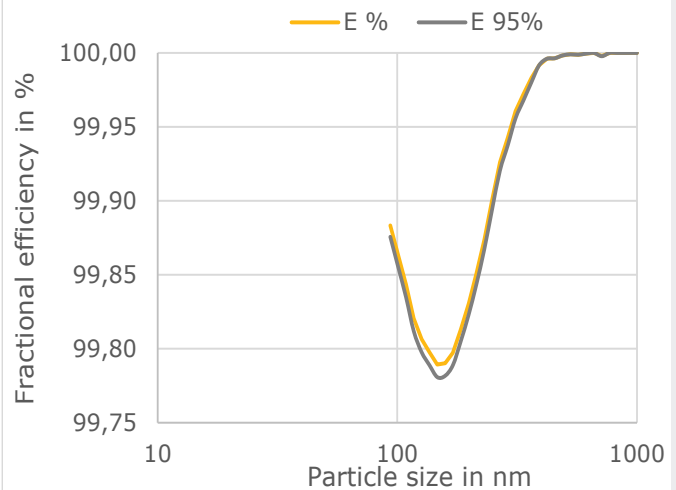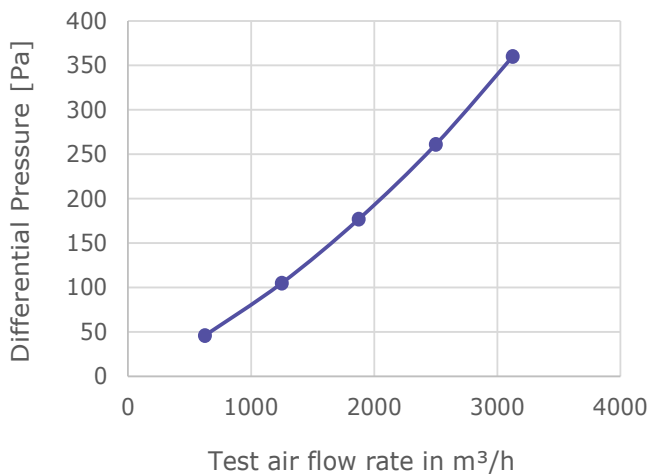

## MPC & MPZ Pure-E12 (Conical & Cylindrical Set)

Filter Media	Water repellent hybrid media
Effective Filter Area	26.8m <sup>2</sup>
Filter Class acc. to EN 1822	E12
Nominal Air Flow Rate	2500m <sup>3</sup> /h
Initial Pressure Drop	260 Pa
Temperature Resistance	80°C

The first **pulsable**  
**prefilter media**  
for an extended  
**filter service life!**



More information about



**PORET<sup>®</sup>**  
**WRAP** 

[here](#)